

IP Remote Control Panel

RM-LP250S (Joystick version)

RM-LP250M (Encoder version)

Controller Diagrams

Super crisp OLED window with large display tiles for setting
Panel can be raised to better view

8 x user buttons

8 x Eight High-quality encoders with RGB backlight for function identification

Programmable pressure and direction sensitive elastomer joypad

Four-way buttons with OLED Legends for dynamic labeling

Recording + streaming buttons

Camera ID display
Tally bar

Master black knob with
Dedicated OLED display

Joystick

Iris control parameters

4-way button for Preview

Most of buttons are able to
assign the function by webUI

RM-LP250S
(Joystick version)

RM-LP250M
(Encoder version)



Main Features

• IP Remote Control for

(1)GY-HC900 series

(2)GY-HC500 series

- Iris control
- Zoom + focus control (if lens supports it)
- Master Black control
- Gain Settings
- AE Levels
- Shutter mode and speed
- WB Mode, WB One Push and WB Paint
- Detail
- Tally
- Character Output Mix
- Menu and Menu Navigation
- Super crisp window with large display tiles for settings


- High-quality encoders with RGB backlight for function identification
- Camera ID display with OLED technology
- RGB tally bar
- Preview button for GPI or control of video router
- Four-way buttons with OLED legends for dynamic labelling and functionality
- Pressure and direction sensitive joystick pad
- Master black knob with dedicated OLED display
- Classic iris joystick or encoder wheel with display and LED bar
- Industry standard form factor (4"/102mm wide)
- Sits console style on table top or mountable in OB van rack

SPECIFICATIONS

Camera control	RM-LP250S can connect x1 camera recorder RM-LP250M can connect x3 camera recorders
Interface	- RJ-45 - DB9 (EXT I/O) connector - Firmware Upgrade via USB2.0
Network Interface	- The controller have a 100 Mbps network interface - Network switch must have Auto-MDI/MDIX - Network switch must support 100 Mbps

GENERAL SPECIFICATIONS

Power	DC 12V, PoE (48V IEEE 802.3af)
Power consumption	6W
Dimensions	RM-LP250S (W) 102.2 mm x (D) 355 mm x (H) 119 mm (the top of the joystick)
	RM-LP250M (W) 102.2 mm x (D) 355 mm x (H) 72 mm
Weight	1.3 kg
Operating temperature	0°C~40°C
Operating humidity	30%RH~80%RH
Storage temperature	-20°C~+50°C
Provided Accessories	1 x Power Adaptor including power plug 1 x 2m CAT.5E Ethernet cable 1 x 1m USB 2.0 Type A/Type Micro B cable

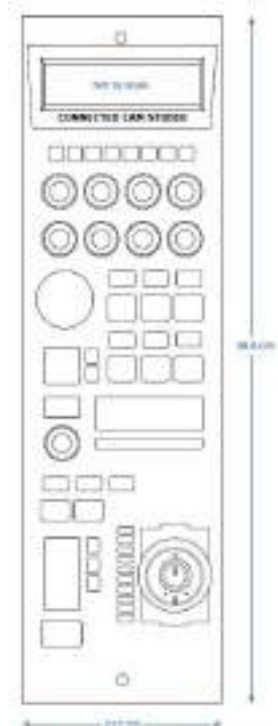

JVCKENWOOD

DISTRIBUTED BY

December06. 2019

"JVC" is the trademark or registered trademark of JVCKENWOOD Corporation.