



## Installing the SK 6212

These sections contain detailed information about installing the SK 6212.

You can find information about operating the SK 6212 under „Using the SK 6212“.


### Inserting and removing the BA 62 rechargeable battery

- ▷ Charge the BA 62 rechargeable battery before using it for the first time. For information about charging, see „Charging rechargeable batteries“. It is possible that new rechargeable batteries cannot be fully charged to 100 % in the first few charging cycles.

The remaining operating time may still be unclear after the first few charging cycles. This will improve over time after more charging cycles because the rechargeable battery calibrates itself.

To insert the BA 62 rechargeable battery into the SK 6212 bodypack transmitter:

- ▷ Open the battery compartment on the SK 6212 bodypack transmitter as shown in the figure.
- ▷ Insert the BA 62 rechargeable battery into the SK 6212 bodypack transmitter as shown in the figure.
- ▷ Close the battery compartment cover until it clicks into place.

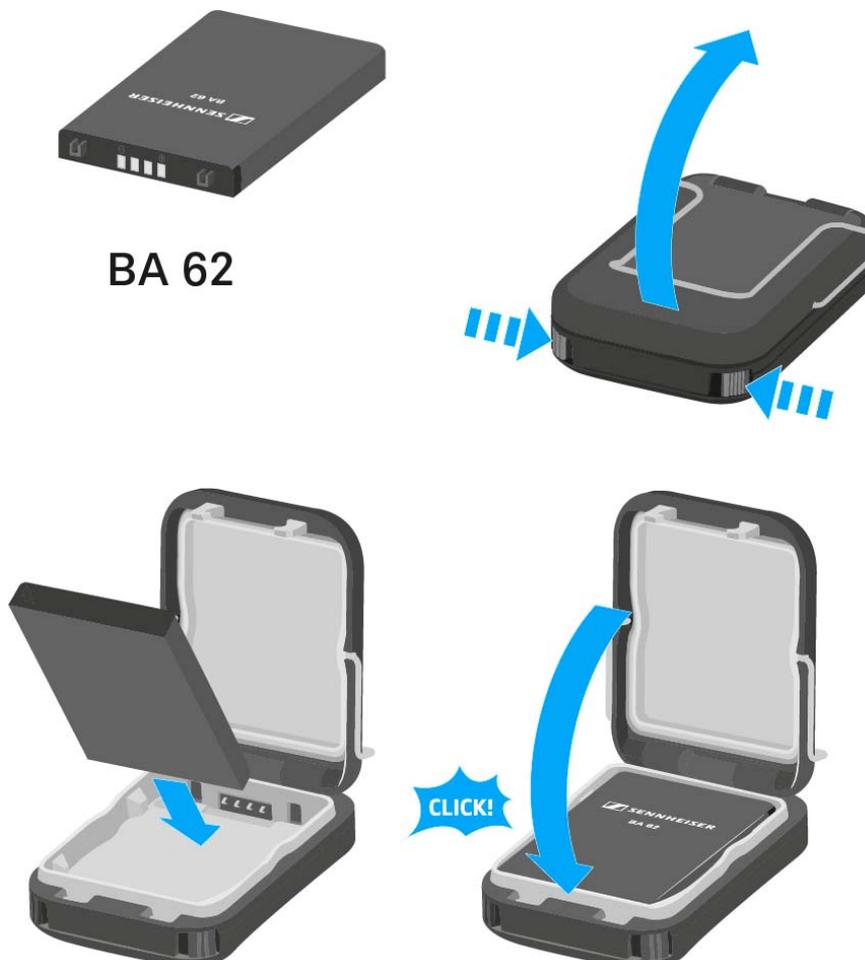



To remove the BA 62 rechargeable battery from the SK 6212 bodypack transmitter:

- ▷ Open the battery compartment on the SK 6212 bodypack transmitter as shown in the figure.
- ▷ Remove the BA 62 rechargeable battery from the SK 6212 bodypack transmitter.

---

#### CAUTION

#### Damage to the bodypack transmitter and/or rechargeable battery/ battery compartment

If you touch the following contacts, they may become dirty or bent.

- Supply voltage contacts and bodypack transmitter contacts
- BA 62 rechargeable battery charging and data contacts
- ▷ Do not touch the contacts on the BA 62 rechargeable battery or the SK 6212 bodypack transmitter.





## Mounting the antenna

To mount the supplied antenna:

- ▷ Connect the antenna to the SK 6212 bodypack transmitter antenna socket as shown in the figure.
- ▷ Tightly screw the antenna coupling ring onto the SK 6212 bodypack transmitter antenna socket.



**i** The antenna can be connected to the antenna socket very gently in only one direction. Do not use force to connect the antenna to the bodypack transmitter antenna socket.



---

The antenna bends very easily.

- ▷ Make sure that the antenna does not touch the housing of the bodypack transmitter.



**i** Rigid antennas are also available as accessories as an alternative to the flexible antennas. See „Antennas and accessories“.

---



## Connecting a microphone to the SK 6212

We recommend using the following Lavalier microphones and headset microphones with the SK 6000 and SK 6212 bodypack transmitters.

Microphone	Features	Article no.
<b>MKE 1-4</b>	Lavalier microphone, omni-directional	502167
<b>MKE 2-4</b>	Lavalier microphone, omni-directional	004736
<b>MKE 40-4</b>	Lavalier microphone, cardioid	003579
<b>HSP 2</b>	Headset microphone, omni-directional	009862
<b>HSP 4</b>	Headset microphone, cardioid	009864
<b>SL Headmic 1-4</b>	Headset microphone, omni-directional	506905
<b>HSP Essential Omni Black 3-pin</b>	Headset microphone, omni-directional, black	508247
<b>HSP Essential Omni Beige 3-pin</b>	Headset microphone, omni-directional, beige	508248
<b>MKE Essential Omni Black 3-pin</b>	Lavalier microphone, omni-directional, black	508251
<b>MKE Essential Omni Beige 3-pin</b>	Lavalier microphone, omni-directional, beige	508252



To connect a microphone to the bodypack transmitter:

- ▷ Use a 3-pin audio connector to connect the microphone cable to the SK 6212 bodypack transmitter audio socket as shown in the figure.
- ▷ Tightly screw the microphone cable coupling ring onto the audio socket thread of the SK 6212 bodypack transmitter.



**i** For more information about using the particular microphone, see the corresponding instruction manual for the microphone. You can find this instruction manual in the download section of the Sennheiser website under [www.sennheiser.com/download](http://www.sennheiser.com/download).